


new dimensions

Ceiling panels

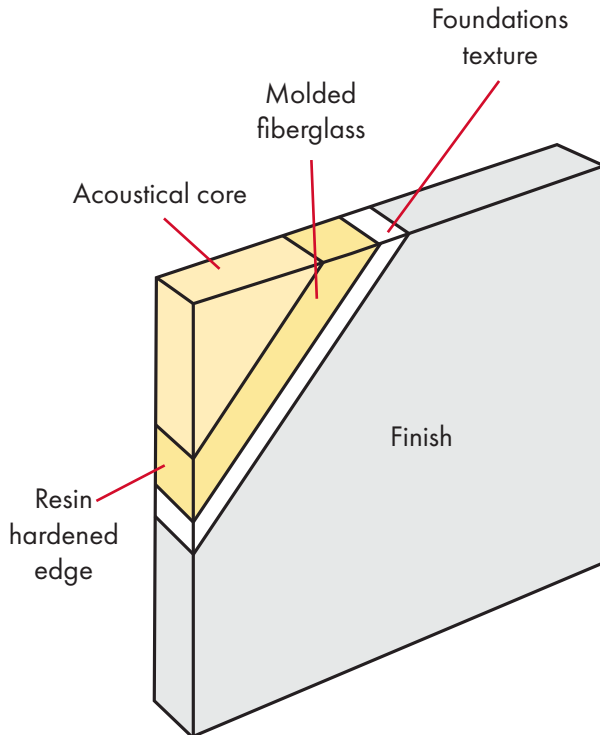

Application

Conwed New Dimensions Acoustical Ceiling Panels are designed for areas requiring excellent acoustical absorption with a 'drywall' look.

Construction

The core construction is a dimensionally stable 6-7 PCF fiberglass board laminated with a 1/8" 16-20 pcf molded fiberglass board, all covered with a specially formulated fiberglass mat. Edges are protected with resin hardening. The acoustically transparent painted finish completely covers the face and exposed edges.

Size availability

Available thicknesses are 1", 1 1/2", and 2", plus the 1/8" molded glass fiberboard. Maximum sizes are 4'x10' for 1 1/2" and 4'x12' or 5'x10' for 1" and 2" panels.

Edge detail

All core edges are chemically hardened, unless otherwise specified. Available shapes include: square, radius, and bevel. For square-edged abutting panels, a kerf and spline is strongly recommended for accurate face alignment. Another fine option is to introduce a small reveal between panels.

Finish

New Dimensions Acoustical Ceiling Panels come factory-finished in a wide variety of colors, including white. Custom colors are also offered to precisely match any interior design palette.

Mounting

Z-Bar to Z-Bar is recommended for ceilings.

Acoustical performance

New Dimensions Acoustical Ceiling Panels provide excellent acoustical performance for auditoriums, theaters, offices, libraries, classrooms, and virtually anywhere sound absorption is required.

Noise reduction coefficient (NRC)

The NRC of the products were determined from an average of sound absorption coefficients determined from tests conducted according to ASTM C 423 procedures in a NVLAP accredited laboratory.

Thickness	NRC
1 1/8"	.85
2 1/8"	.90

Fire performance

Each component has been tested according to ASTM E 84* and has a Class I/A rating.

Warranty (3-year limited)

New Dimensions Acoustical Ceiling Panels have a limited 3-year warranty starting from date of shipment. The panels are warranted to be free from defects in material and workmanship. See product warranty for details and limitations.

* The ASTM E 84 standard should be used to measure and describe the properties of materials, products or assemblies in response to heat and flame under controlled laboratory conditions and should not be used to describe or appraise the fire hazard or fire risk of materials, products or assemblies under actual fire conditions. However, results of this test may be used as elements of a fire risk assessment, which takes into account all of the factors, which are pertinent to an assessment of the fire hazard of a particular end use.

new dimensions

Ceiling panels

PART 1 – General

- 1.1** Work in this section shall be subject to drawings, general conditions, schedules, addenda and other contract documents.
- 1.2** The extent of the acoustical panels is shown on the drawings and in the schedules.
- 1.3** Submit _____ (select quantity) samples of each type of acoustical panel as shown on the drawings and in schedules and include appropriate technical information including test data and maintenance instructions. Submit _____ (select quantity) fabric selector cards from manufacturer's standard finishes, or designer specified finishes.
- 1.4** Acoustical panels shall be installed according to manufacturer's recommendations and instructions.
- 1.5** Installation of acoustical panels shall not begin until all wet work (plastering, concrete, etc.) is completed and dry. Building shall be properly enclosed and under standard occupancy conditions (temperature of 60-85°F and not more than 70% relative humidity) before installation begins.
- 1.6** The contractor shall be responsible for the examination and acceptance of all surfaces and conditions prior to the acoustical panel installation.
- 1.7** Substitutions or changes will only be permitted by prior approval by the architect.

PART 2 – Materials

- 2.1** Acoustical ceiling panels shall be: New Dimensions Ceiling Panels as manufactured by Conwed.
- 2.2** Acoustical Panels shall be constructed of a composite core construction of dimensionally stable rigid fiberglass of 6-7 pcf density laminated to ½" 16-20 pcf molded glass fiber. Thickness (choose one) 1", 1½", 2" plus ⅛" or custom _____ (specify).
- 2.3** Sizes: _____ width and _____ high or as shown on drawings. Standard maximum size is 48" wide x 120" high for 1½" and 48" x 144" or 5' x 10' for other thicknesses. Custom or larger sizes available; consult manufacturer. Panels are to be manufactured according to field dimensions supplied by the installing contractor. Standard tolerances are ± ⅛" in width and length.
- 2.4** Edge profile shall be: Square, radius, full bevel, half-bevel, miter, or custom _____ (specify). Corner detail shall be: Square or custom _____ (specify). Edge treatment shall be: chemically hardened, aluminum or high-pressure laminate (with square edge only) or custom _____ (specify).
- 2.5** Panel finish shall be New Dimension acoustically transparent finish, which is applied over an acoustically transparent membrane. _____ (please specify color). Finish shall be applied directly over the face and edges of the panel to provide a full finished edge. All corners are fully tailored.
- 2.6** Mounting shall be: Lay-in, resin spots, Z-bar to Z-bar, or custom _____ (specify). Adhesive, miscellaneous fasteners, (i.e. nails, screws, etc.) and standard continuous wall leveling angle are to be supplied by the contractor.

- 2.7** Acoustical Performance – panels shall have a minimum NRC of _____ (please specify) in accordance with ASTM C-423 (Type "A" Mounting).
- 2.8** Flammability – All panel components shall have a Class "A" fire rating in accordance with ASTM E-84.

**Thank you for choosing Conwed®
for your acoustical needs.**

The information provided above is correct to the best of our knowledge at time of printing. We reserve the right to make changes without prior notification.

Environmental and sustainability

Conwed is a worldwide leader in building material systems, insulation and composite solutions, delivering a broad range of high-quality products and services. Conwed is committed to driving sustainability by delivering solutions, transforming markets and enhancing lives. More information can be found at www.conwed.com.

Notes

For additional information, refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via www.conwed.com.

Disclaimer of liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Conwed makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein.

