


metro rebound panels

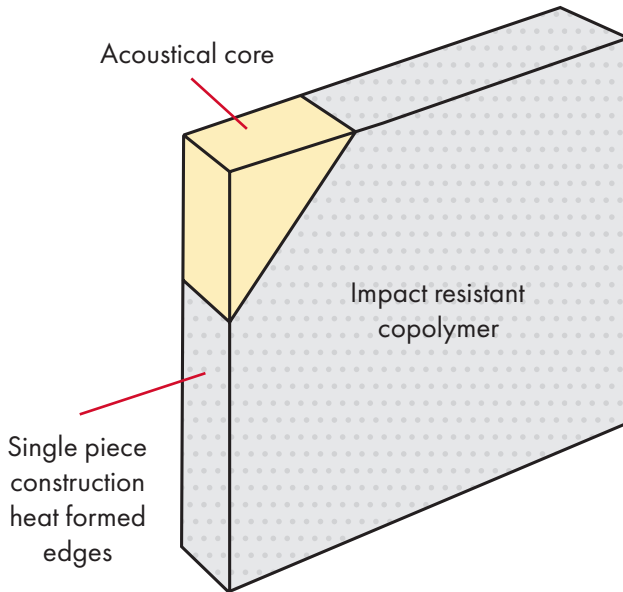

Application

Conwed Metro Rebound panels are designed for use in high abuse areas requiring sound absorption and clean-ability. A "pan" of perforated co-polymer over fiberglass allows sound absorption while withstanding many forms of punishment. Use in gymnasiums, hotels, multi-purpose rooms – anywhere requiring an impact resistant sound absorbent panel.

Construction

This panel features an innovative combination of dimensionally stable 6-7 PCF fiberglass board, with a 1/16" resilient perforated co-polymer face sheet with heat-formed edges.

Size availability

Thicknesses include: 1 1/16", 1 9/16" and 2 1/16". Widths are up to 48", and lengths to 116" for 1", and 114" for 2". Custom widths up to 51" are available with 1 1/16" thickness. Standard tolerance is ± 1/64"; a reveal of 1/8" is required between panels.

Edge detail

All core edges, square only, are chemically hardened underneath the heat-formed co-polymer.

Finish

The co-polymer is available in 5 standard/stocked colors with many custom colors also available.

Mounting

Standard wall mountings include; spot adhesive with optional impaling clips, Z-clip, hook & loop, and magnetic fasteners. Z-bar to Z-bar is the recommended ceiling mount.

Acoustical performance

Our products are constantly modified to achieve their maximum acoustical performance while providing the aesthetics desired in their applications.

Please consult with your Sales Representative, or the Company's Technical Services Department for assistance in determining the proper panels, and their acoustical specifications, for your application.

Noise reduction coefficient (NRC)

The NRC of the products were determined from an average of sound absorption coefficients obtained from tests conducted according to ASTM C 423 procedures in a NVLAP accredited laboratory.

HZ	125	250	500	1000	2000	4000	NRC
Thickness 1 1/16"	0.03	0.25	0.75	1.10	1.13	0.97	0.80
Thickness 2 1/16"	0.17	0.79	1.23	1.22	1.10	1.06	1.10

Fire performance

Each component has been tested according to ASTM E 84* and has a Class I/A rating.

Warranty (3-year limited)

Metro Rebound panels have a limited 3-year warranty starting from date of shipment. The panels are warranted to be free from defects in material. See product warranty for details and limitations.

* The ASTM E 84 standard should be used to measure and describe the properties of materials, products or assemblies in response to heat and flame under controlled laboratory conditions and should not be used to describe or appraise the fire hazard or fire risk of materials, products or assemblies under actual fire conditions. However, results of this test may be used as elements of a fire risk assessment, which takes into account all of the factors, which are pertinent to an assessment of the fire hazard of a particular end use.

metro rebound panels

PART 1 – General

- 1.1** Work in this section shall be subject to drawings, general conditions, schedules, addenda and other contract documents.
- 1.2** The extent of the acoustical panels is shown on the drawings and in the schedules.
- 1.3** Submit _____ (select quantity) samples of each type of acoustical panel as shown on the drawings and in schedules and include appropriate technical information including test data and maintenance instructions. Submit _____ (select quantity) fabric selector cards from manufacturer's standard finishes, or designer specified finishes.
- 1.4** Acoustical panels shall be installed according to manufacturer's recommendations and instructions.
- 1.5** Installation of acoustical panels shall not begin until all wet work (plastering, concrete, etc.) is completed and dry. Building shall be properly enclosed and under standard occupancy conditions (temperature of 60-85°F and not more than 70% relative humidity) before installation begins.
- 1.6** The contractor shall be responsible for the examination and acceptance of all surfaces and conditions prior to the acoustical panel installation.
- 1.7** Substitutions or changes will only be permitted by prior approval by the architect.

PART 2 – Materials

- 2.1** Metro Rebound panels shall be: Metro Rebound panels as manufactured by Conwed.
- 2.2** Acoustical Panels shall be constructed of a composite core construction of dimensionally stable rigid fiberglass of medium 6-7 PCF density, laminated to a 1/16" resilient perforated co-polymer face sheet. Thickness (choose one) 1 1/16", 1 3/16", 2 1/16" or custom _____ (specify).
- 2.3** Sizes: _____ width and _____ high or as shown on drawings. Standard maximum size is 48" wide x 116" high (nominal). Custom or larger sizes up to 51" widths are available; consult manufacturer. Panels are to be manufactured according to field dimensions supplied by the installing contractor. Standard tolerances are $\pm 1/16$ " in width and length.
- 2.4** Edge profile shall be square. Corner detail shall be square. Edge treatment shall be chemically hardened beneath heat-formed co-polymer.
- 2.5** Panel finish shall be _____ (specify co-polymer color). Co-polymer shall be applied directly to face and edges of the panel.
- 2.6** Mounting shall be: Adhesive/Resin, Impaling/Adhesive/ Resin, Lay-in, Magnet, VELCRO® Panel Clip to Z-Bar, Panel Clip to Double Wall Clip, Z-Bar to Z-Bar (recommended for ceilings), Aluminum Z-Clips, Panel Clips/VELCRO® or custom _____ (specify). Adhesive, miscellaneous fasteners, (i.e. nails, screws, etc.) and standard continuous wall leveling angle are to be supplied by the contractor.

- 2.7** Acoustical Performance – panels shall have a minimum NRC of _____ (please specify) in accordance with ASTM C-423 Test Procedure.
- 2.8** Flammability – All panel components shall have a Class "A" fire rating in accordance with ASTM E-84.
- 2.9** R-Value is _____. (Calculated using the R-factor of 4.16 per inch of thickness.)

**Thank you for choosing Conwed®
for your acoustical needs.**

The information provided above is correct to the best of our knowledge at time of printing. We reserve the right to make changes without prior notification.

Environmental and sustainability

Conwed is a worldwide leader in building material systems, insulation and composite solutions, delivering a broad range of high-quality products and services. Conwed is committed to driving sustainability by delivering solutions, transforming markets and enhancing lives. More information can be found at www.conwed.com.

Notes

For additional information, refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via www.conwed.com.

Disclaimer of liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Conwed makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein.

