




Eurospan® Acoustic Wall System

Eurospan® Acoustical Wall System provides outstanding acoustic benefits from virtually any wall application without the traditional look of fabric covered panels. The system is designed to dampen interior noise and add acoustic benefits to any commercial, educational or institutional application where a seamless aesthetic is desired.

Product features

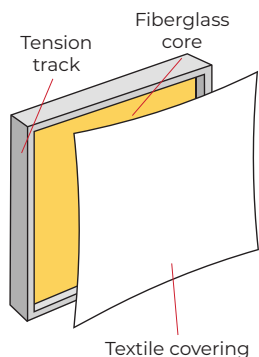

Core construction:

Comprised of three basic components: a fiberglass acoustic core, perimeter tension track and outer textile covering. This seamless product uses a high-performance integrated fiberglass core with a white matte covering. Tension tracks arranged around the perimeter hold an acoustically transparent textile which can be stretched over areas 16' wide.

Size availability	Edge details	Finishes	Mounting	Shapes
<ul style="list-style-type: none"> Thicknesses: ½", 1", 1 ½", 2" <p>Custom size is our standard.</p>	<p>Eurospan® has a monolithic surface which merges unobtrusively with the room's interior design. Spaces of 16'x40' or more can be covered seamlessly. Larger areas can be seamed almost invisibly or installed with reveals to highlight the edges.</p>	<ul style="list-style-type: none"> Several textile choices including classic white, optic white, beige, light blue, black, custom special-order colors, and printed images. <p>Custom printed imaging File types <u>Vector:</u> AI, EPS, SVG, PDF <u>Raster:</u> JPG, TIFF, PDF, PNG, PSD (300DPI or higher) <u>File size:</u> 3MB minimum.</p>	<ul style="list-style-type: none"> Square, bevel, radius perimeter track or square, bevel, radius mid joint track. 	—

Acoustic performance

The NRC of the products are determined from an average of sound absorption coefficients, obtained from tests conducted according to ASTM C423 procedures in an NVLAP accredited laboratory.

	HZ →	125	250	500	1000	2000	4000	NRC ↓
½" thickness		—	—	—	—	—	—	—
1" thickness (A mounting)		0.14	0.40	0.95	1.07	1.08	1.01	0.90
1 ½" thickness		—	—	—	—	—	—	—
2" thickness		—	—	—	—	—	—	—

Additional properties

*Conwed products meet or exceed ASTM E84 standards for smoke development and flame spread on a component level.

	Fire rating*	Impact resistant	Scratch resistance	NAF available	Washable	Warranty
½" thickness	1/A (ASTM E84)	—	—	—	—	10 years (from date of shipment received)
1" thickness	1/A (ASTM E84)	—	—	✓	—	
1 ½" thickness	1/A (ASTM E84)	—	—	✓	—	
2" thickness	1/A (ASTM E84)	—	—	✓	—	

Initiatives

Sustainability

Conwed is committed to driving sustainability wherever possible. By streamlining our processes and using recycled materials in our products, we strive to decrease our environmental impact. Our materials are certified by leading social responsibility groups and are helping us pave the way toward a more sustainable future.



For your LEED® projects, our products can help you qualify for different points depending on the product you choose. Contact us to learn more detailed information.

Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.