




Acoustic Art Ceiling Tiles

Acoustic Art Ceiling Tiles give you the freedom to merge your creative ideas with the sound-absorbing qualities of our world-class acoustic solutions. Use your company's logo, your school's mascot, or a photo from your recent family vacation. The only limit is your imagination. Connect with us today to see how Acoustic Art by Conwed can add design flair to your space.

Product features

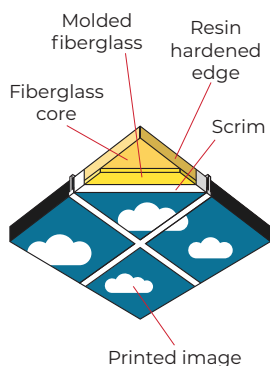

Core construction:

Dimensionally-stable 6-7 PCF fiberglass board, laminated with a layer of 1/8" 16-20 PCF molded fiberglass, covered with a specially-formulated fiberglass scrim, and finished with a custom-printed image. Edges are protected with resin hardening.

Size availability	Edge details	Finishes	Mounting	Shapes
<ul style="list-style-type: none"> Thicknesses: 1 1/8", 1 5/8" Standard ceiling grid sizing*: 2'x2', 2'x4' <p><i>*Larger images can be spread over multiple panels</i></p>	<p>All edges are resin hardened.</p> <p>Edges have a black painted finish.</p> <p>Available choices include:</p> <ul style="list-style-type: none"> Lay-In: Square Tegular: 3/16", 1 5/16" 	<p>Custom printed imaging.</p> <p>File types: Vector: AI, EPS, SVG, PDF Raster: JPG, TIFF, PDF, PNG, PSD (300DPI or higher)</p> <p>File size: 3MB minimum</p>	<p>Standard mountings:</p> <ul style="list-style-type: none"> Ceiling grid system Custom 3/16" or Standard 1 5/16" 	<p>—</p>

**Copyright disclaimer: Users acknowledge that all images, names, dates, and other content added to their design are correct and they own all copyrights to them or have full authorization to use them.*

Acoustic performance

The NRC of the products are determined from an average of sound absorption coefficients, obtained from tests conducted according to ASTM C423 procedures in an NVLAP accredited laboratory.

HZ →	125	250	500	1000	2000	4000	*NRC ↓
1 1/8" thickness	0.09	0.48	0.93	1.13	1.10	1.03	0.90
1 5/8" thickness	—	—	—	—	—	—	—

**These NRC values are from direct-attach tests of the same product. NRC values for this application are equal to or greater than these values.*

Additional properties

*Conwed products meet or exceed ASTM E84 standards for smoke development and flame spread on a component level.

	Fire rating*	Improved impact resistance	Scratch resistance	NAF available	Washable	Warranty
1 1/8" thickness	1/A (ASTM E84)	✓	—	✓	—	3 years (from date of shipment received)
1 5/8" thickness	1/A (ASTM E84)	✓	—	—	—	

Initiatives

Sustainability

Conwed is committed to driving sustainability wherever possible. By streamlining our processes and using recycled materials in our products, we strive to decrease our environmental impact. Our materials are certified by leading social responsibility groups and are helping us pave the way toward a more sustainable future.



For your LEED® projects, our products can help you qualify for different points depending on the product you choose. Contact us to learn more detailed information.

Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.