



The Express Hanging System


► XHS

The Express Hanging System

► XHS

The Express Hanging System is an interchangeable set of hardware that allows baffles and clouds to be installed quickly, in any environment, suspended 10' to 1 3/4", and always remain perfectly square.

A perfect install, every time.

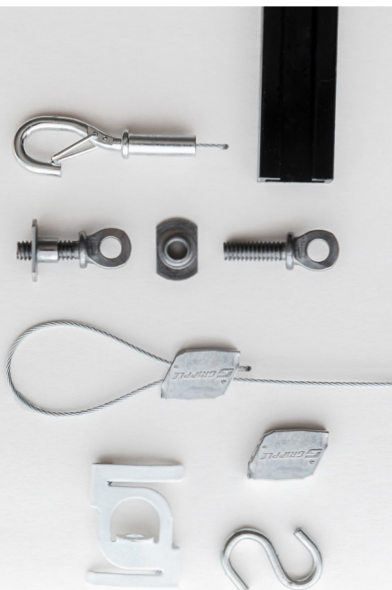

Slide Channel




Slide nut + Eye screw



Grid Twist Clip



S-hook



Express Hanger + Express Cable + Clasp Hook

Mounting combinations

	Slide Channel	Grid (Retrofit)
Close Suspension 1 3/4"-3"		
Long Suspension 2 1/2"-10"		


Why we made it

Most products install with individual anchors into the deck of the ceiling, each individually measured. XHS saves both time and money by using minimal installation points that serve as a straight and square connection for multiple products.

In the table shown, we've estimated the total cost of installing a project with traditional mounting methods vs. XHS.

	New Method	Old Method
Time of install	19 hrs	29 hrs
Total time on site	2 days	4 days

One-hundred 3-foot baffles in a 30'x10' open plenum ceiling, with extra cable for a long suspension.

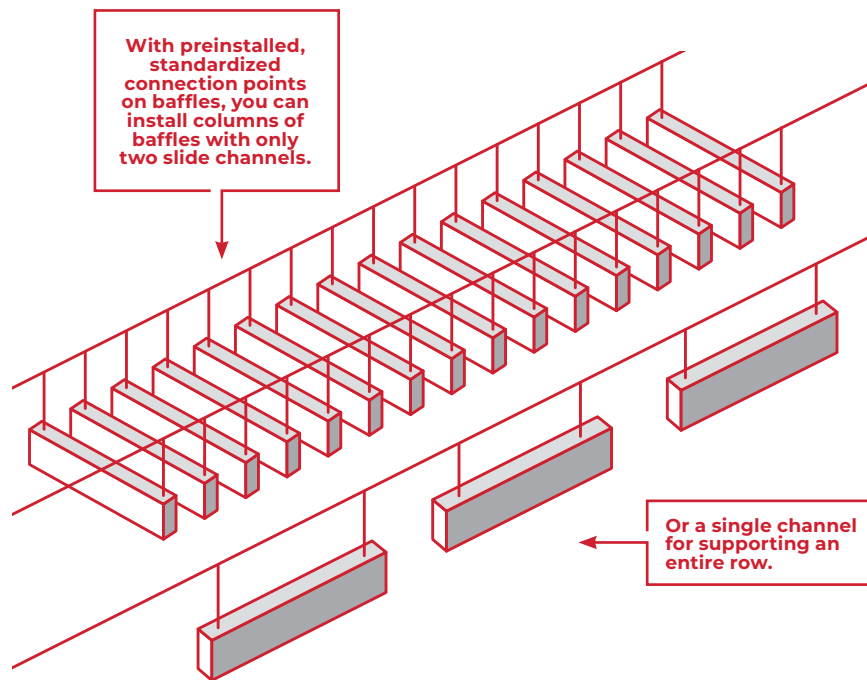

Installation options ►

Slide Channel

Cut and attach needed lengths of Slide Channels to the deck according to the design. Slide Channels install directly using #8 screws, spaced 2" apart.

Close Suspension

Connect S-Hooks to cloud/baffle, then connect the opposite end to an Eye Screw and Slide Nut pair, only partially screwed through the Slide Nut. Insert Slide Nuts into the Slide Channels moving them into position. To securely fasten Eye Screws, disconnect one S-Hook, tighten, reattach, and close the S-Hook with tongue and groove pliers. Repeat on remaining connection points.

Long Suspension

Connect the Express Hanger & Cables to cloud/baffle with 12" of extra slack from the design, with the Clasp Hook end away from the product. Connect Clasp Hooks to an Eye Screw and Slide Nut pair, only partially screwed through the Slide Nut.

Insert Slide Nuts into the Slide Channels, moving them into position. To securely fasten Eye Screws, disconnect one Clasp Hook and tighten, then reattach and repeat. Lastly, adjust Express Hanger for height, and clip excess Express Cable.

Grid (Retrofit)

Attach the required amount of Grid Twist Clips to the existing grid system, roughly spaced according to the design. Different amounts are needed depending on the length of the product being installed.

Close suspension

Connect S-Hooks to all cloud/baffle connections. Then connect all baffles by their S-Hooks to the corresponding Grid Twist Clips, adjusting position as needed. Lastly, close the S-Hook with tongue and groove pliers.

Long Suspension

Connect the Express Hanger & Cables to cloud/baffle with 12" of extra slack from the design, with the Clasp Hook end away from the baffle. Connect all Clasp Hooks to Grid Twist Clips, adjusting position as necessary. Lastly, adjust Express Hanger for height, and clip excess Express Cable.

Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.