


Low Frequency Tuner

► Specialized


These panels are engineered for areas needing control over low frequencies without affecting higher frequencies. Often used in spaces that need balanced absorption across the entire audio spectrum, such as music and performance areas.

Items to specify

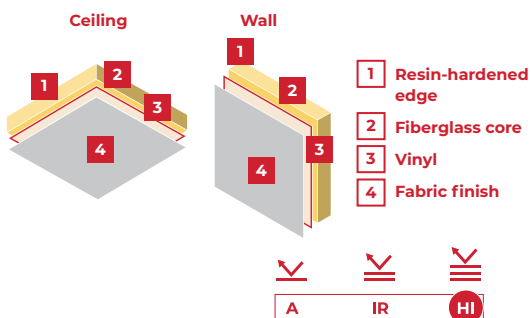

Click for full specsheet
conwed.com/specsheet-lowfrequencytuner

Mounting type

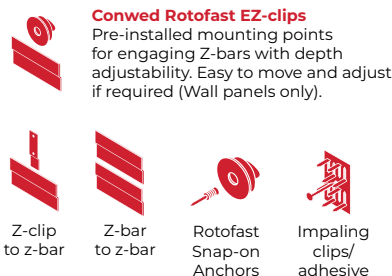

Hotmelt fabric adhesion

Provides superior bond strength lasting the lifetime of the product. Easily reactivated for field repairs and modification.

Corners



Fabric partners

Carnegie **kvadrat** Guilford of Maine
DESIGNTEX **Knoll** **maharam**

Edge profile



Fire rating

Conwed products meet or exceed ASTM E84 standards for smoke development and flame spread on a component level.



Shapes

—



Washable

Refer to the Maintenance & Cleaning Guide for more details.
conwed.com/cexp-maintenanceandcleaning



Sustainability

For your LEED projects, our products can help you qualify for different points depending on the product you choose. Contact us to learn more detailed information.
 To view our certificate visit conwed.com/cexp-LEED.



Warranty

3 years. Refer to Warranty for more details.
conwed.com/cexp-warranty

Max size availabilities

- **Standard core** max size
- **NAF (No-Added-Formaldehyde core)** max size

Thickness	4'x10'	4'x12'	5'x10'
2"	• ◦	•	•

Acoustic performance

The NRC of the products are determined from an average of sound absorption coefficients, obtained from tests conducted according to ASTM C423 procedures in an NVLAP accredited laboratory.

HZ →	125	250	500	1000	2000	4000	NRC ↓
2"	0.43	0.32	0.42	0.27	0.18	0.17	0.30