




All products made-to-order.

Diffusers | Barrel

► Specialized

Barrel Diffusers are designed for use in performance areas, auditoriums, and other facilities requiring enhanced quality and acoustic performance. Diffusers scatter and blend sounds in a broad range of frequencies to improve the quality of any listening environment.

Items to specify

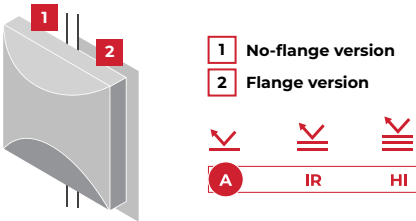

Construction

Both Barrel & Pyramidal Diffusers can be made from thermoform or gel coat.

Thermoform

Copolymer formed with heat into the diffuser shape/size using a mold.

Gel Coat

Fiberglass and resin mixture is sprayed into a mold to create the diffuser shape/size.

Mounting type



Standard mountings

L-angles and hook & loop fasteners

Ceiling diffusers

Mounted using 1½" flange to fit standard ceiling grid. ¾" grid uses additional mounting clip.

Dimensions

Height: Minimum of 24 inches.
Length: Minimum of 24 inches.

Paint finish



Fabric finish

Carnegie kvadrat Guilford of Maine
DESIGNTEX Knoll maharam

Foundations

Foundations | Painted products can be left unpainted, to be finished in the field.

Click for Word specsheet
conwed.com/wordspecsheet-barreldiffuser

SECTION 098416 ► FIXED SOUND-REFLECTIVE PANELS

PART 1—GENERAL

1.1—SUMMARY

- A. Section includes:
Fixed sound-reflective panels.
- B. Related work:
The following items are not included in this Section and are specified under the designated Sections:
Section 092100 – PLASTER AND GYPSUM BOARD ASSEMBLIES for plaster and gypsum board walls and ceilings.

1.2—SUBMITTALS

- A. Product data:
Submit manufacturer's product data including certified laboratory test reports and other data required to show compliance with these specifications.
- B. Samples:
Submit 8 ¾ x 11 inch (for thicknesses up to 1 ½ inches) or 11 ½ x 11 ½ inch (for thicknesses larger than 1 ½ inches) samples of representative panel with factory detailed edge, and representative samples of mounting devices.

1.3—QUALITY ASSURANCE

- A. Pre-installation conference:
Conduct conference at Project site to comply with requirements in Division 01.

1.4—DELIVERY, STORAGE, AND HANDLING

- A. Project conditions:
Protect system components from excessive moisture in shipment, storage, and handling. Deliver in unopened bundles and store in a dry place with adequate air circulation. Do not deliver material to building until wet conditions such as concrete, plaster, paint, and adhesives have been completed and cured to a condition of equilibrium.

1.5—LIMITED WARRANTY

- A. Limited warranty:
Provide manufacturer's standard limited 3-year warranty against manufacturing defects in material or workmanship.



Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.

Click for latest document version
conwed.com/specsheet-barreldiffuser

PART 2—PRODUCTS

2.1—SOUND DIFFUSERS:

A. Basis-of-Design: Conwed Diffusers | Barrel

1. **Construction:** 0.125 inch thermo-formed fire resistant plastic molded to a one-piece barrel. Also available as fiberglass laid behind a gel coat finish in a mold.
2. **Sizes:** 2'x2', 2'x4', and custom.
3. **Corners:** Square.
4. **Edge profile:** Straight.
5. **Edge profile:** Flange.
6. **Finish type:** Thermoformed with White Haircell texture.
7. **Finish type:** Fiberglass gelcoat with white lemon peel texture.
8. **Finish type:** Chosen paint color.
9. **Fabric finish:** Manufacturer, pattern and color as selected; applied directly over face and edges of panels to provide full finished edge, fully tailored corners.
10. **Mounting type (wall):** Straight edged diffusers: L-angles and hook and loop fasteners.
11. **Mounting type (ceiling):** Flanged to fit standard 15/16 inch ceiling grid.
12. **Mounting type (ceiling):** Straight edge with L-angles.
13. **Flammability (ASTM E 84):** Panel components shall have a Class "A" rating per ASTM E 84.
14. **Acoustical performance:** Values below are for panels mounted in accordance with ASTM C 423 (Type D5 Mounting) and vary by panel thickness and finish.
 - a. **Noise reduction coefficient (NRC):** 0.10.

PART 3—EXECUTION

3.1—INSTALLATION:

- A. Verify wet work such as plastering and concrete is complete and dry. Verify building is enclosed and under standard occupancy conditions (60 - 85°F and not more than 70% relative humidity) prior to start of installation. Commencement of installation constitutes Installer's acceptance of surfaces and conditions.
- B. Install products in accordance with manufacturer's written instructions and in proper relationship with adjacent construction.
- C. Touch-up, repair or replace damaged units until satisfactory results are obtained.

PROJECT ARCHITECT RESPONSIBILITY ►

This is a general specification guide, intended to be used by experienced construction professionals, in conjunction with good construction practice and professional judgment. This guide is to aid in the creation of a complete building specification that is to be fully reviewed and edited by the architect of record (specifier). Sections of this guide should be included, edited, or omitted based on the requirements of a specific project. It is the responsibility of both the specifier and the purchaser to determine if a product or system is suitable for its intended use. Neither Conwed, nor any of its subsidiary or affiliated companies, assume any responsibility for the content of this specification guide relative to actual projects and specifically disclaim any and all liability for any errors or omissions in design, detail, structural capability, attachment details, shop drawings or other construction related details, whether based upon the information provided by Conwed or otherwise.

—END OF SECTION—



Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.