




All products made-to-order.

# Eurospan | Baffle

► System

Create seamless baffles spanning hundreds of feet, add custom lighting for ambience, or just rely on it for superior acoustical performance.

## Items to specify

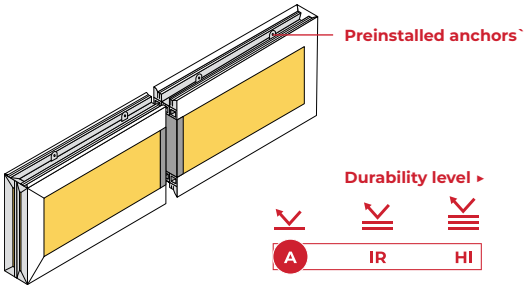

### Assembly

- Up to 6 foot sections are made in our factory with acoustic core pre installed
- Individual sections are connected on-site then suspended
- Suspended full length baffle is finished with fabric, hiding all connection points

[conwed.com/eurospan-baffle-installguide](http://conwed.com/eurospan-baffle-installguide)

### Edge profile



Square

### Dimensions

Height: 8 to 30 inches and custom.  
Length: 16 inch minimum and custom.

### Core thickness

2 7/8"

Click for Word specsheet  
[conwed.com/wordspecsheets/eurospan-baffle](http://conwed.com/wordspecsheets/eurospan-baffle)

## SECTION 098436 ► SOUND-ABSORBING CEILING UNITS PART 1—GENERAL

### 1.1—SUMMARY

- A. Section includes:  
Fabric-wrapped Eurospan baffles.
- B. Related work:  
The following items are not included in this Section and are specified under the designated Sections:  
Section 092100 – PLASTER AND GYPSUM BOARD ASSEMBLIES for plaster and gypsum board walls and ceilings.

### 1.2—SUBMITTALS

- A. Product data:  
Submit manufacturer's product data including certified laboratory test reports and other data required to show compliance with these specifications.
- B. Samples:  
Submit 8 x 16 inch samples of representative panel with factory detailed edge, and representative samples of mounting devices.

### 1.3—QUALITY ASSURANCE

- A. Pre-installation conference:  
Conduct conference at Project site to comply with requirements in Division 01.

### 1.4—DELIVERY, STORAGE, AND HANDLING

- A. Project conditions:  
Protect system components from excessive moisture in shipment, storage, and handling. Deliver in unopened bundles and store in a dry place with adequate air circulation. Do not deliver material to building until wet conditions such as concrete, plaster, paint, and adhesives have been completed and cured to a condition of equilibrium.

### 1.5—LIMITED WARRANTY

- A. Limited warranty:  
Provide manufacturer's standard limited 10-year warranty against manufacturing defects in material or workmanship.



Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.

Click for latest document version  
[conwed.com/specsheet-eurospan-baffle](http://conwed.com/specsheet-eurospan-baffle)

## 2.1—SOUND ABSORPTIVE STRETCH FABRIC SYSTEM:

### A. Basis-of-Design: Conwed Eurospan | Baffle

1. **Construction:** Composite core construction of dimensionally stable rigid fiberglass, Frame and tuck tracks
2. **Fiberglass Density:** 3 pcf fiberglass 2 inches thick.
  - a. Core laminated with thin white veil.
3. **Assembly accessories:** Express Hanging System.
4. **Recycled content:** For fiberglass, 56 percent post-consumer recycled content.
5. **Thickness:** 2 7/8 inches.
6. **Height:** 8 to 30 inches and custom.
7. **Length:** 16 inches minimum, custom length maximum.
8. **Corners:** Square
9. **Edge profile:** Square.
10. **Fabric Finish:** Manufacturer, pattern and color as selected; field applied directly over face and edges of panels to provide full finished edge, fully tailored corners.
11. **Mounting type:** Eye screws
12. **Flammability (ASTM E 84):** Panel components shall have a Class “A” rating per ASTM E 84.
13. **Acoustical performance:** Values below are for panels mounted in accordance with ASTM C 423 (Type J Mounting) and vary by finish.
  - a. **Noise reduction coefficient (NRC)** for 2 7/8” inch thickness: 1.0.

# PART 3—EXECUTION

## 3.1—INSTALLATION:

- A. Verify wet work such as plastering and concrete is complete and dry. Verify building is enclosed and under standard occupancy conditions (60 - 85°F and not more than 70% relative humidity) prior to start of installation. Commencement of installation constitutes Installer’s acceptance of surfaces and conditions.
- B. Install products in accordance with manufacturer’s written instructions and in proper relationship with adjacent construction.
- C. Touch-up, repair or replace damaged units until satisfactory results are obtained.

# PROJECT ARCHITECT RESPONSIBILITY ►

This is a general specification guide, intended to be used by experienced construction professionals, in conjunction with good construction practice and professional judgment. This guide is to aid in the creation of a complete building specification that is to be fully reviewed and edited by the architect of record (specifier). Sections of this guide should be included, edited, or omitted based on the requirements of a specific project. It is the responsibility of both the specifier and the purchaser to determine if a product or system is suitable for its intended use. Neither Conwed, nor any of its subsidiary or affiliated companies, assume any responsibility for the content of this specification guide relative to actual projects and specifically disclaim any and all liability for any errors or omissions in design, detail, structural capability, attachment details, shop drawings or other construction related details, whether based upon the information provided by Conwed or otherwise.

—END OF SECTION—



Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.