



All products made-to-order.

Wall Panel

Product

Fabric

Finish

IR


Durability

Conwed Panels are reliable, all-purpose acoustic solutions. Capable of multiple levels of durability, highly-customizable finishes, and mounting options, this product is suitable for schools, auditoriums, theaters, offices, and libraries: anywhere noise control is needed.

► Respond Series

Tackable surface


Items to specify

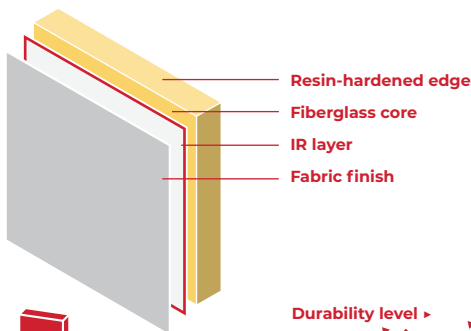

Finish wrapped on all sides



Mounting type

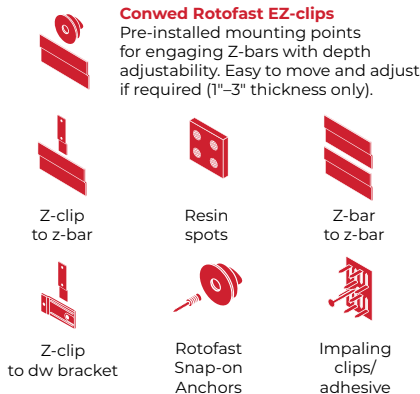

Corners



Edge profile



Dimensions

Height: Max of 60 inches or custom.
Length: Max of 120 inches or custom.
Maximum Size: For thickness of 4 1/8 inches, max of 24 square feet.

Core thickness

5/8" 7/8" 1 1/8" 1 5/8" 2 1/8" 3 1/8" 4 1/8"

Hotmelt fabric adhesion

Provides superior bond strength lasting the lifetime of the product. Easily reactivated for field repairs and modification.

Fabric finish

Carnegie kvadrat Guilford of Maine
DESIGNTEX Knoll maharam

Click for Word specsheet
conwed.com/wordspecsheet-wallpanel-fabric-ir

SECTION 098413 ► FIXED SOUND-ABSORPTIVE PANELS

PART 1—GENERAL

1.1 — SUMMARY

- A. Section includes:
Fixed sound-absorptive panels.
- B. Related work:
The following items are not included in this Section and are specified under the designated Sections:
Section 092100 – PLASTER AND GYPSUM BOARD ASSEMBLIES for plaster and gypsum board walls and ceilings.

1.2 — SUBMITTALS

- A. Product data:
Submit manufacturer's product data including certified laboratory test reports and other data required to show compliance with these specifications.
- B. Samples:
Submit 8 3/4 x 11 inch (for thicknesses up to 1 1/2 inches) or 11 1/2 x 11 1/2 inch (for thicknesses larger than 1 1/2 inches) samples of representative panel with factory detailed edge, and representative samples of mounting devices.

1.3 — QUALITY ASSURANCE

- A. Pre-installation conference:
Conduct conference at Project site to comply with requirements in Division 01.

1.4 — DELIVERY, STORAGE, AND HANDLING

- A. Project conditions:
Protect system components from excessive moisture in shipment, storage, and handling. Deliver in unopened bundles and store in a dry place with adequate air circulation. Do not deliver material to building until wet conditions such as concrete, plaster, paint, and adhesives have been completed and cured to a condition of equilibrium.

1.5 — LIMITED WARRANTY

- A. Limited warranty:
Provide manufacturer's standard limited 3-year warranty against manufacturing defects in material or workmanship.



Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.

Click for latest document version
conwed.com/specsheet-wallpanel-fabric-ir

2.1 — SOUND ABSORPTIVE PANELS:

A. **Basis-of-Design: Conwed Wall Panel | Fabric | IR**

Formerly known as Conwed Respond IR Wall Panel

1. **Construction:** Composite core construction of dimensionally stable rigid fiberglass, laminated with a 1/8 inch layer of impact-resistant material.
2. **Fiberglass Density:** 6–7 pcf.
3. **Cores laminated** with 1/8 inch layer of impact-resistant material.
4. **Recycled content:** For fiberglass, 52 percent pre-consumer and 5 percent post-consumer recycled content.
5. **Core thickness:** 5/8 inch.
6. **Core thickness:** 7/8 inch.
7. **Core thickness:** 1 1/8 inches.
8. **Core thickness:** 1 5/8 inches.
9. **Core thickness:** 2 1/8 inches.
10. **Core thickness:** 3 1/8 inches.
11. **Core thickness:** 4 1/8 inches.
12. **Height:** Max of 60 inches or custom.
13. **Length:** Max of 120 inches or custom.
14. **Corners:** Square.
15. **Corners:** Radius.
16. **Edge profile:** Square.
17. **Edge profile:** Radius.
18. **Edge profile:** Bevel.
19. **Edge profile:** Miter.
20. **Edge profile:** Kerf/Square.
21. **Edge treatment:** Resin hardened.
22. **Edge treatment:** Aluminum.
23. **Edge treatment:** High-pressure laminate for square edge only.
24. **Fabric adhesion:** Conwed Hotmelt is standard for bonding fabric to the substrate.
25. **Fabric finish:** Manufacturer, pattern and color as selected; applied directly over face and edges of panels to provide full finished edge, fully tailored corners.
26. **Mounting type:** Impaling clips/perimeter adhesive.
27. **Mounting type:** Concealed spline.
28. **Mounting type:** Z-Clips to Z-Bar.
29. **Mounting type:** Z-Clip to DW Bracket.
30. **Mounting type:** Z-Bar to Z-Bar.
31. **Mounting type:** Resin spots.
32. **Mounting type:** Rotofast™ Snap-on Anchors.
33. **Mounting type:** Conwed Rotofast™ Z-Clip.
34. **Flammability (ASTM E 84):** Panel components shall have a Class “A” rating per ASTM E 84.
35. **Resistivity to heat or cold:** R-factor of 4.16 per inch of thickness.
36. **Acoustical performance:** Values below are for panels mounted in accordance with ASTM C 423 (Type D5 Mounting) and vary by panel thickness and finish.
 - a. **Noise reduction coefficient (NRC)** for 5/8 inch thickness: 0.70.
 - b. **Noise reduction coefficient (NRC)** for 7/8 inch thickness: 0.80.
 - c. **Noise reduction coefficient (NRC)** for 1 1/8 inch thickness: 0.90.
 - d. **Noise reduction coefficient (NRC)** for 1 5/8 inch thickness: 1.00.
 - e. **Noise reduction coefficient (NRC)** for 2 1/8 inch thickness: 1.05.
 - f. **Noise reduction coefficient (NRC)** for 3 1/8 inch thickness: —.
 - g. **Noise reduction coefficient (NRC)** for 4 1/8 inch thickness: —.

PART 3—EXECUTION

3.1 — INSTALLATION:

- A. Verify wet work such as plastering and concrete is complete and dry. Verify building is enclosed and under standard occupancy conditions (60 - 85°F and not more than 70% relative humidity) prior to start of installation. Commencement of installation constitutes Installer’s acceptance of surfaces and conditions.
- B. Install products in accordance with manufacturer’s written instructions and in proper relationship with adjacent construction, including the following:
For adhesive installation to substrate, provide temporary support to prevent panel slippage. Note: Impaling clips are designed to help hold panels in place until adhesive dries.
- C. Touch-up, repair or replace damaged units until satisfactory results are obtained.

PROJECT ARCHITECT RESPONSIBILITY ►

This is a general specification guide, intended to be used by experienced construction professionals, in conjunction with good construction practice and professional judgment. This guide is to aid in the creation of a complete building specification that is to be fully reviewed and edited by the architect of record (specifier). Sections of this guide should be included, edited, or omitted based on the requirements of a specific project. It is the responsibility of both the specifier and the purchaser to determine if a product or system is suitable for its intended use. Neither Conwed, nor any of its subsidiary or affiliated companies, assume any responsibility for the content of this specification guide relative to actual projects and specifically disclaim any and all liability for any errors or omissions in design, detail, structural capability, attachment details, shop drawings or other construction related details, whether based upon the information provided by Conwed or otherwise.

—END OF SECTION—



Disclaimer of liability: Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Conditions of use may vary and are beyond our control, and because of this Conwed makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.

Click for latest document version
conwed.com/specsheet-wallpanel-fabric-ir